


Typical Flue Types

The type of flue you have dictates the design of fire you can install. Please see the flue types as illustrated below and then check the specification chart to see which fire would be suitable for your application.

Class I Flue

Older houses usually have a Class I solid-fuel flue (identifiable by the 'chairbrick' at the back of the opening) which has a minimum 7" diameter and generally terminates with a brick or stone built chimney.

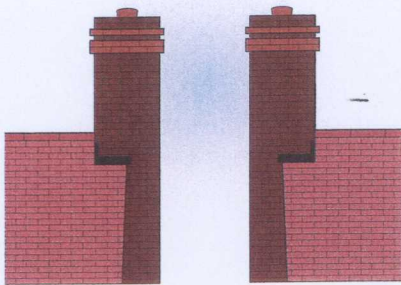


Pre-cast Flue

A more modern home may have a pre-cast flue (usually identifiable from the starter block or letter-box opening) that terminates with a ridge tile, as illustrated below.



Class 2 Flue


Newer homes may also have a Class 2 flue with a 5" minimum diameter that terminates with a cowl. The most common is a gas cowl as illustrated below.

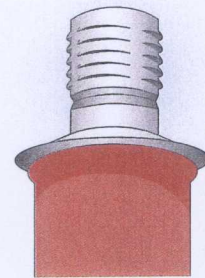


* Fan Flue Option

A fan flue alternative is available for new homes built without a chimney or older properties where the flue is no longer of sound integrity. All that is required is a suitable outside wall.

Hole in the wall fan flue minimum dimensions

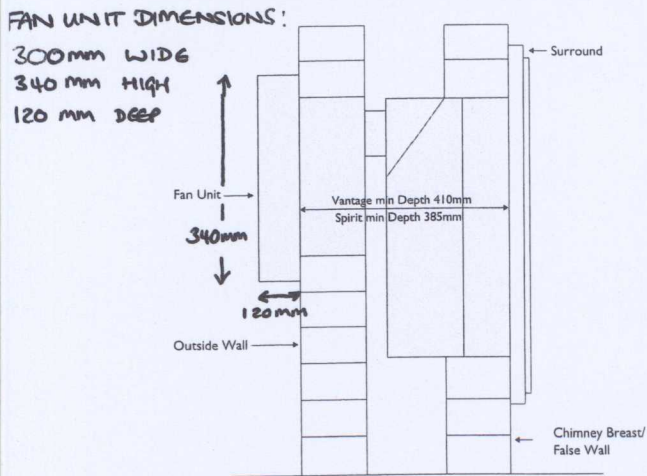

Standard fan flue minimum dimensions

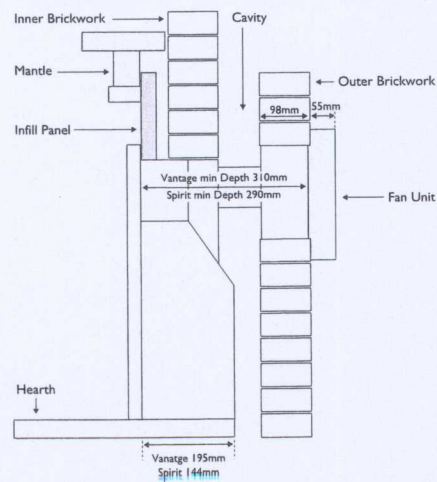

General Information

We recommend that a fireguard be used where children, the elderly and infirm are present.

Legend Fires policy is one of constant development and improvement. We reserve the right to change the design and specification to our range of products without formal notice. All Legend products are fitted with oxy-sensing pilots and flame supervision device as standard. We advise that Legend products are installed and serviced annually by a CORGI registered engineer.